

11 Disassembly and Reassembly




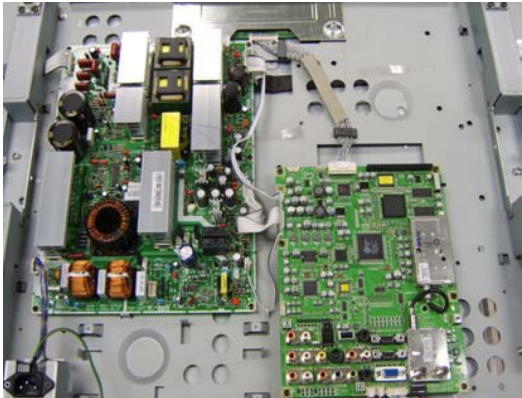
This section of the service manual describes the disassembly and reassembly procedures for the TFT-LCD TV.

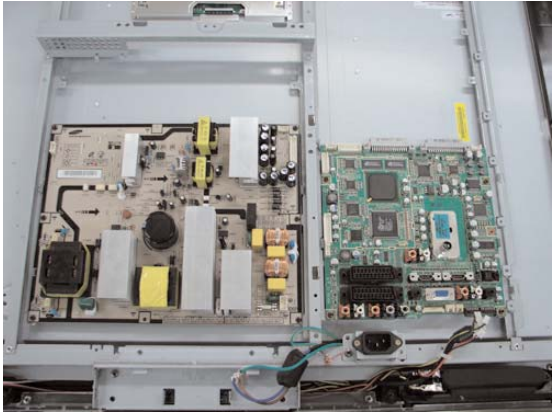
⚠ WARNING : This monitor contains electrostatically sensitive devices. Use caution when handling these components.

11-1 Disassembly

- ⚠ Cautions :**
1. Disconnect the monitor from the power source before disassembly.
 2. Follow these directions carefully; never use metal instruments to pry apart the cabinet.

Description	Picture Description
<p>1. Place LCD TV face down on cushioned table.</p> <p>Remove screws from the rear cover.</p> <p>Remove screws from grip on the stand and remove the stand.</p> <p>Remove stand and rear cover.</p>	 A photograph showing the back of a grey LCD TV. It is placed on a green cushioned surface. The rear cover, stand, and various ports are visible.
	 A close-up photograph showing a hand holding the black stand of the TV. Two white arrows point downwards, indicating the direction to pull the stand away from the back of the TV's rear cover.
	 A close-up photograph showing the rear cover of the TV being lifted away from the main cabinet. Two black arrows point upwards, indicating the direction to lift the cover. The internal components of the TV are visible underneath.

Description	Picture Description
<p>2. Remove Screws form the Jack cover and Disconnect cables.</p>	
	
<p>3. Remove shield and Remove Screws and cable from the boards.</p>	
	

Description	Picture Description
	

11-2 Reassembly

Reassembly procedures are in the reverse order of disassembly procedures.

Memo